



CUTTING TABLE FOR ROLLER BLINDS US-1


Cutting table REXEL US-1 is a modern, powerful and professional piece of equipment for roller blinds manufacturing.

Main advantages of the table:

- Depending on the needs, removable knife heads can cut fabric by ultrasonic or mechanical round knife.
- Touch screen panel provides easy and intuitive control, supporting languages: Polish, English, French and Russian.
- Fully automatic cutting process.
- Pneumatic clamping line provides even fabric pressure from the both sides of the table.
- Knife moving length during the cutting may be limited by the width of the material, thanks to the material sensor.
- Big illumination screen (260 mm width) is situated between the cutting line and material feed device.
- Precise length and angle measuring device is designed to regulate angles and length of the required fabric piece.
- Massive and strong table construction is made of powder coated steel profiles.
- It is possible to adjust height of the table using adjustment screws in the legs of the table.
- The table consists of the two pieces: cutting module itself and the post cutting module. There is a possibility of purchasing only cutting module and using it with the own cutting table.

Specifications:

Cutting width: standard 3000 mm, option 3200 mm
Table width: standard 3200 mm, option 3400 mm
Tabletop length after cut-off line: 2600 mm – 5000 mm
Whole width: 3740 mm
Whole length: 3370 mm – 5770 mm
Tabletop height: 900 mm
Cutting speed: Min: 0,1 m/s, Max: 0,55 m/s
Blade rotation speed: 2300 rpm
Blade diameter: 108 mm
Voltage: 230 V
Wattage: 900 W
Ultrasonic knife: Yes
Mechanical round knife: Yes
Fabric clamp: Pneumatic, two side
Screen: Yes, standard

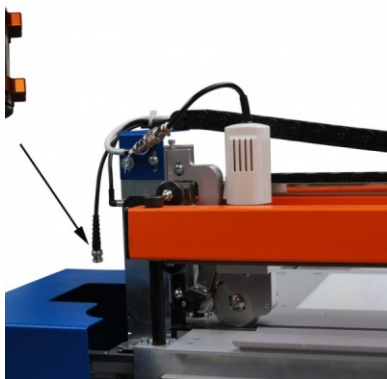

+48 697 530 240
+48 61 876 89 46
info@rexelpoland.com



Scan the code


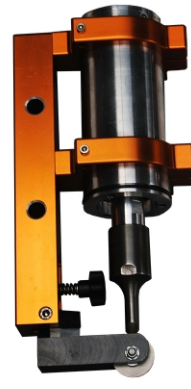
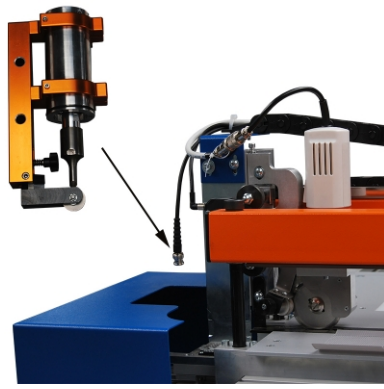


Table of basic dimensions of US-1 cutting tables depending on the selected table module length (for max. cutting width 2000mm)

| Table module length [mm] | Total length [mm] | Max. measuring length [mm] |
|--------------------------|-------------------|----------------------------|
| 3000 | 3017 | 2700 |
| 3400 | 4217 | 3900 |
| 4000 | 4817 | 4500 |
| 4200 | 5017 | 4700 |
| 5000 | 5817 | 5500 |